

16 CH HDCVI 2 SATA HDD Analog Digital Video Recorder

Specifications

Model		CJ-HDR216
Video/ Audio IF		
Video Input		16 CH, BNC
Type	HDCVI	720p/ 1080p HDCVI
	Analog	NTSC/ PAL
Video Output		1 HDMI, 1 VGA
Audio Input		1 CH, RCA
Audio Output		1 CH, RCA
Two-way Talk		Reuse audio input/ output CH 1
Display		
Output Resolution		1920x1080, 1280x1024, 1280x720, 1024x768
Multiscreen Mode		1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Video/ Audio Format		
Video/Audio Compression		H.264/ G.711
Record Rate*	Main Stream	1080P (1~12/15fps)/ 720P/ 960H/ D1 (1~25/30fps)
	Extra Stream	CIF/ QCIF (1~25/30fps), D1 (1~12/15fps)
Bit Rate		96~4096Kb/s
Record Mode		Manual, Schedule (Regular (Continuous), MD), Stop
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Alarm/ Event		
Trigger Events		Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection		Motion Detection, MD Zones: 396 (22x18), Video Loss & Camera Blank
Playback & Backup		
Sync Playback		1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode		USB Device/Network
Network		
Network Interface		RJ-45 port (10/100M/ 1000M)
Network Functions		HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access		128 users
Mobile Device		iPhone, iPad, Android
HDD		
Type		2 SATA ports, up to 12TB
External Interface		
USB Interface		2 ports (1 Rear), USB2.0
RS485 Camera Interface		1 port, For PTZ Control
General Specifications		
Power Supply		DC12V/5A
Power Consumption		15W (without HDD)
Working Environment		-10°C~+55°C / 10%~90%RH/ 86~106kpa
Dimension(WxDxH)		1U, 375mmx285mmx55mm
Weight		2.35KG (without HDD)




Key Features

- 16 CH with 720p real-time recording playback and live view
- H.264 video encode
- 1/4/9/16 CH synchronous real time playback
- HDMI/ VGA simultaneous video output
- Support 2 SATA HDDs up to 12 TB, 2 USB
- Digital Zoom in Live & Playback
- iPhone, iPad & Android

Standard Accessories

- Quick guide..... 1 pc
- Important safety instruction.....1 pc
- CD1pc

Appearance

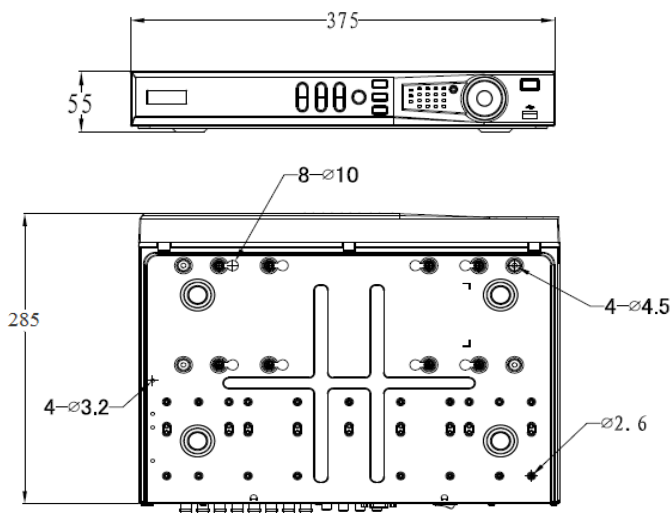

-Auto Reboot (once a week)

- Recording rate of CH 1, CH 5, CH 9, or CH 13 set at 1080p (16~25/30fps), will only allow the other channels to record at 1080P (1~7fps) or 720p (1~15fps).

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: