

# How to change web login authority immediately

(KX-HDV1xx series/230/330/430 )

No. 04-001

Sep 7 , 2016

Ver.1.1

Panasonic Corporation

## Abstract about this document


This document describe about procedure for changing web login authority immediately. Sometimes you may receive “403 forbidden” error when you login to Web menu by changing login user id. In such case, please follow the procedure described in this document.

## Revision history

Date	Version	Revision	Firmware version
Dec 14, 2015	Ver. 1.0	Initial Release	All versions
Sep 07, 2016	Ver. 1.1	HDV430 is added	All versions

# Procedure for changing web login authority immediately

HDV1xx/230/330/430

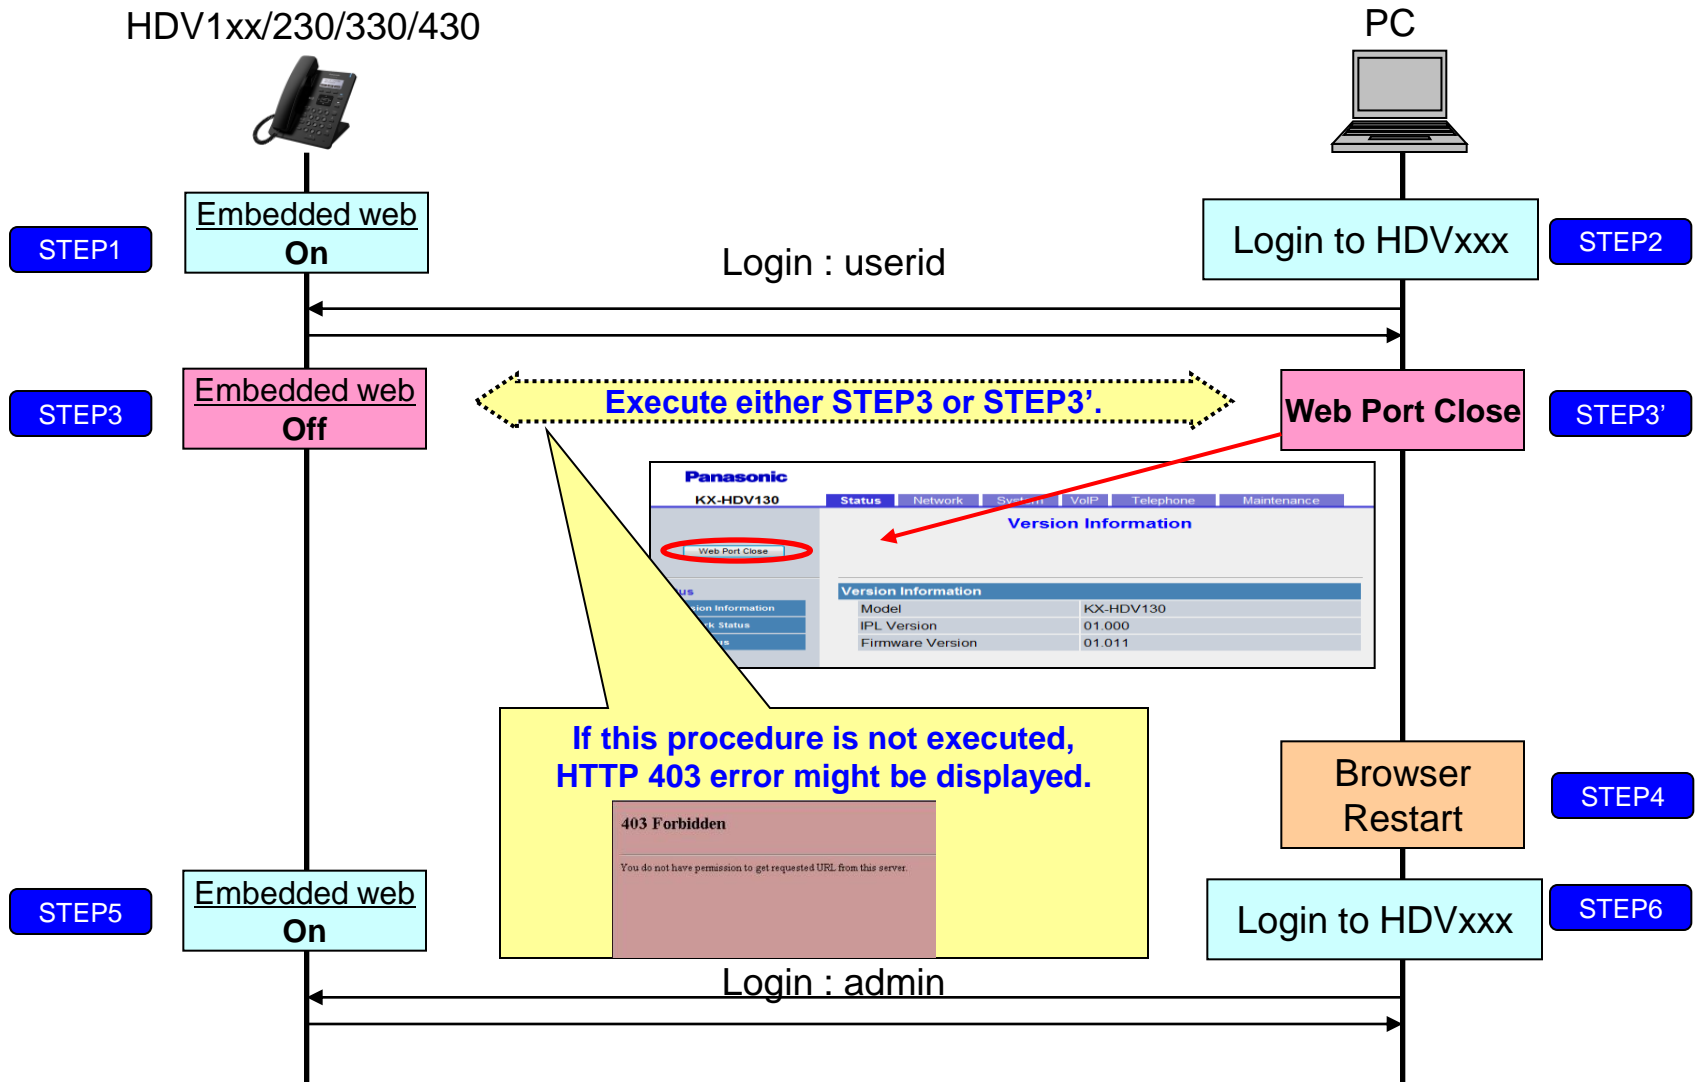

Sometimes you may receive "403 forbidden" error when you login to Web menu by changing login user id from previous login user id. If you receive this error, please turn off and turn on the embedded web setting or close port as described in "STEP3 or STEP3'". Pleaser refer next page for how to control embedded web setting.

# How to access Web user interface

1. Confirm the IP address of KX-HDV1xx/230/330/430.

1-1 : HDV130/230 : [Menu] → select [System Setting] → [OK] → select [Status] → [OK]  
→ select [IPv4 Settings] → [OK] → select [IP Address] → [OK]

HDV330 : touch [System Setting] → touch [Status] → touch [IPv4 Settings]

1-2 : Confirm the IP address displayed on LCD.

2. Embedded Web.

2-1 : [Menu] → [Basic Settings] → [Other Option] → [Embedded Web] → On.

2-2 : Select (On) → [OK].

3. Access the Web user interface.

3-1 : Open your Web browser.

3-2 : Enter your KX-HDVxxx URL to Web browser  
(http://your KX-HDVxxx IP address) .

3-3 : Enter Authentication ID and password and click “OK”.  
(Default :ID=“admin”, password=“adminpass”)